

8 7 6 5 4 3 2 1

REV:	DESCRIPTION	BY	DATE
V1.0	New issue	SD-05	

D

C

B




A

D

C

B

A

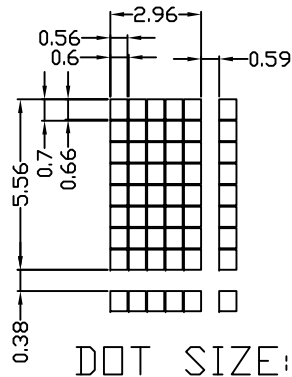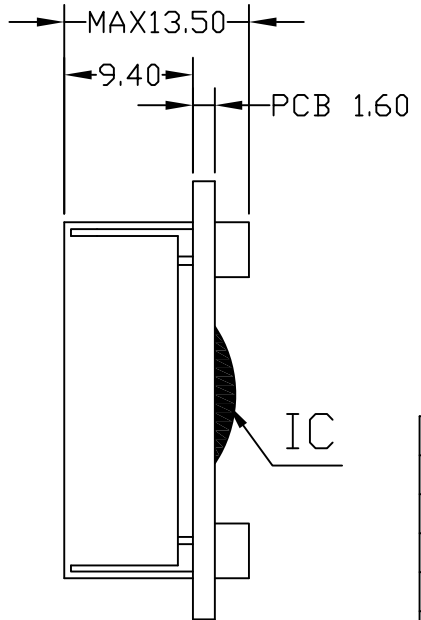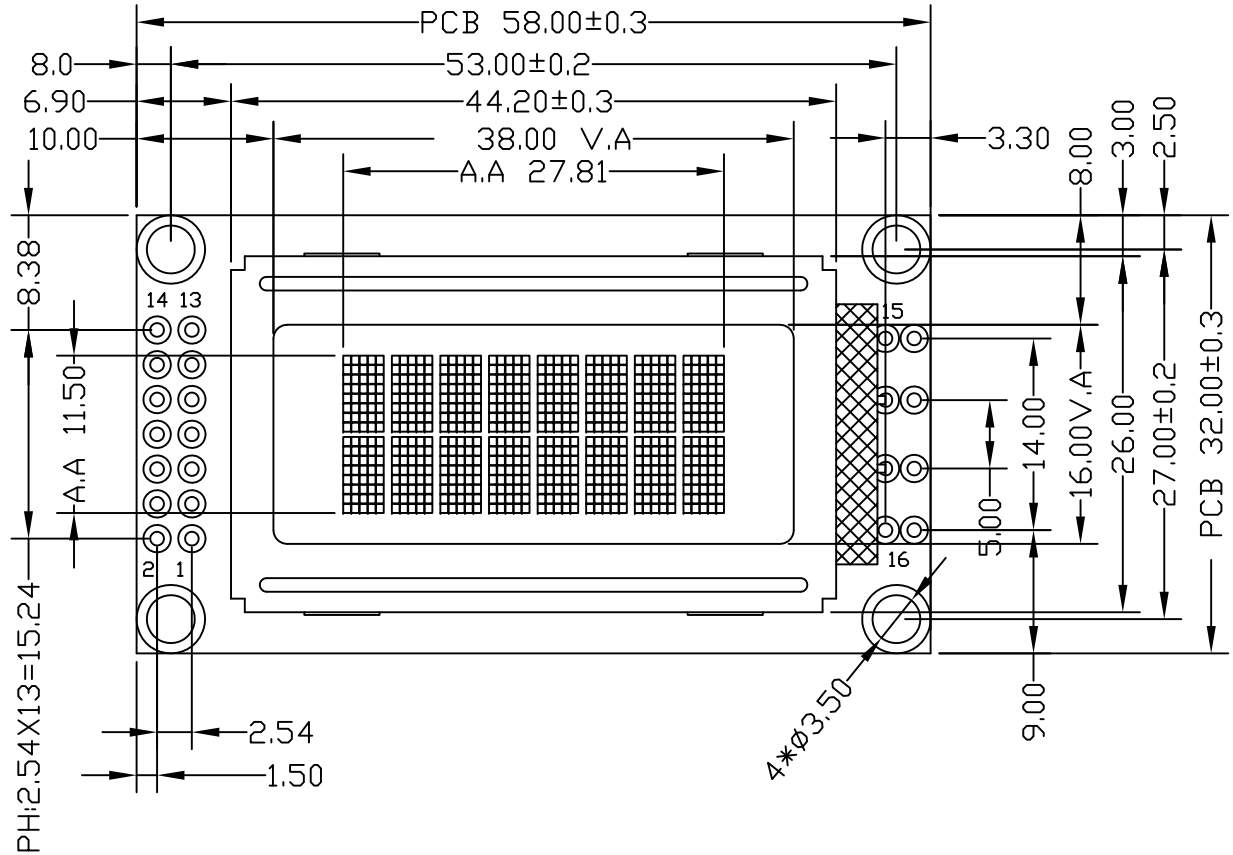

NO	Symbol
1	VSS
2	VDD
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A
16	K

NOTES :

- 1. LCD TYPE: STN, Y-G Positive Transmissive
- 2. OPERATING VOLTAGE: VDD=5.0V, Vop=4.70V
- 3. VIEWING DIRECTION: 6 O'CLOCK
- 4. DRIVE METHOD: 1/16 Duty, 1/4 Bias
- 5. OPERATING TEMP: -20°C TO +70°C
- 6. STORAGE TEMP: -30°C TO +80°C
- 7. CONNECTOR TAPE: Zebra
- 8. DRIVER IC: AIP31066 or Equivalent
- 9. BACKLIGHT: Yellow-Green
- 10. ALL sub-parts and materials of the parts, must comply with the RoHS instructions of EU.

UTECH UTECH DISPLAY TECHNOLOGY CO., LTD.

TOLERANCES: ±0.2	UNIT: MM	MODEL NO:	www.utechdisplay.com		
ANGLES: ±0.1°		UDCB0802-01			
	DATE	DESIGNED	CHECKED	APPROVED	REV: 1.0
	2017-04-29	UD-03		UD-02	PAGE: 1-1

8 7 6 5 4 3 2 1