

8

7

6

5




4

3


2

1

| REV: | DESCRIPTION | BY | DATE |
|------|-------------|-------|------|
| V1.0 | New issue | SD-05 | |
| | | | |

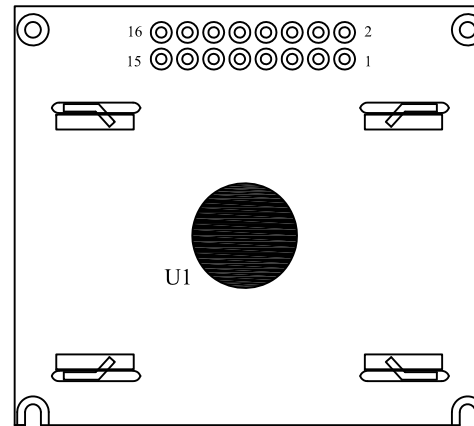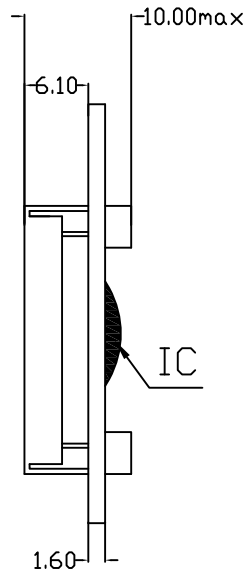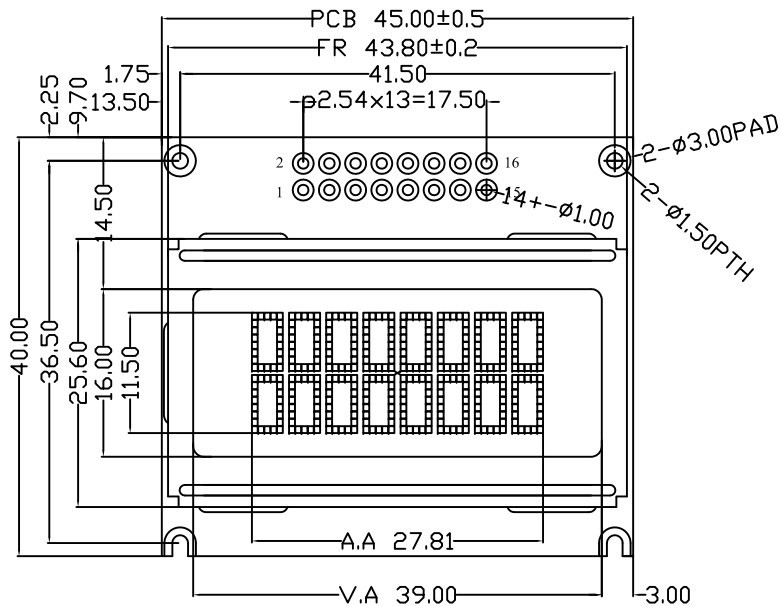

| NO | Symbol |
|----|---------|
| 1 | VSS |
| 2 | VDD |
| 3 | V0 |
| 4 | RS |
| 5 | RW |
| 6 | E |
| 7 | DB0 |
| 8 | DB1 |
| 9 | DB2 |
| 10 | DB3 |
| 11 | DB4 |
| 12 | DB5 |
| 13 | DB6 |
| 14 | DB7 |
| 15 | A(5.0V) |
| 16 | K |



NOTES :

- 1. LCD TYPE: STN,Y-G Positive Transmissive
- 2. OPERATING VOLTAGE: VDD=5.0V, Vop=4.70V
- 3. VIEWING DIRECTION: 6 O'CLOCK
- 4. DRIVE METHOD: 1/16 Duty, 1/5 Bias
- 5. OPERATING TEMP: -20°C TO +70°C
- 6. STORAGE TEMP: -30°C TO +80°C
- 7. CONNECTOR TAPE: Zebra
- 8. DRIVER IC: AIP31066 or Equivalent
- 9. BACKLIGHT: 1PCS LED Yollow-Green VI=15mA
- 10. ALL sub-parts and materials of the parts,must comply with the RoHS instructions of EU.

UTECH UTECH DISPLAY TECHNOLOGY CO., LTD.

| | | | | | |
|-----------------|--------------------|--------------------------|----------------------|-------------------|-----------------------|
| TOLERANCES:±0.2 | UNIT:MM | MODEL NO: UDCB0802-03 | www.utechdisplay.com | | |
| ANGLES:±0.1° | DATE 2019-01-29 | DESIGENED UD-03 | CHECKED | APPROVED UD-02 | REV: 1.0 PAGE: 1-1 |

D

C

B

A

D

C

B

A

8

7

6

5

4

3

2

1