


REV:	DESCRIPTION	BY	DATE
V1.0	New issue	SD-05	

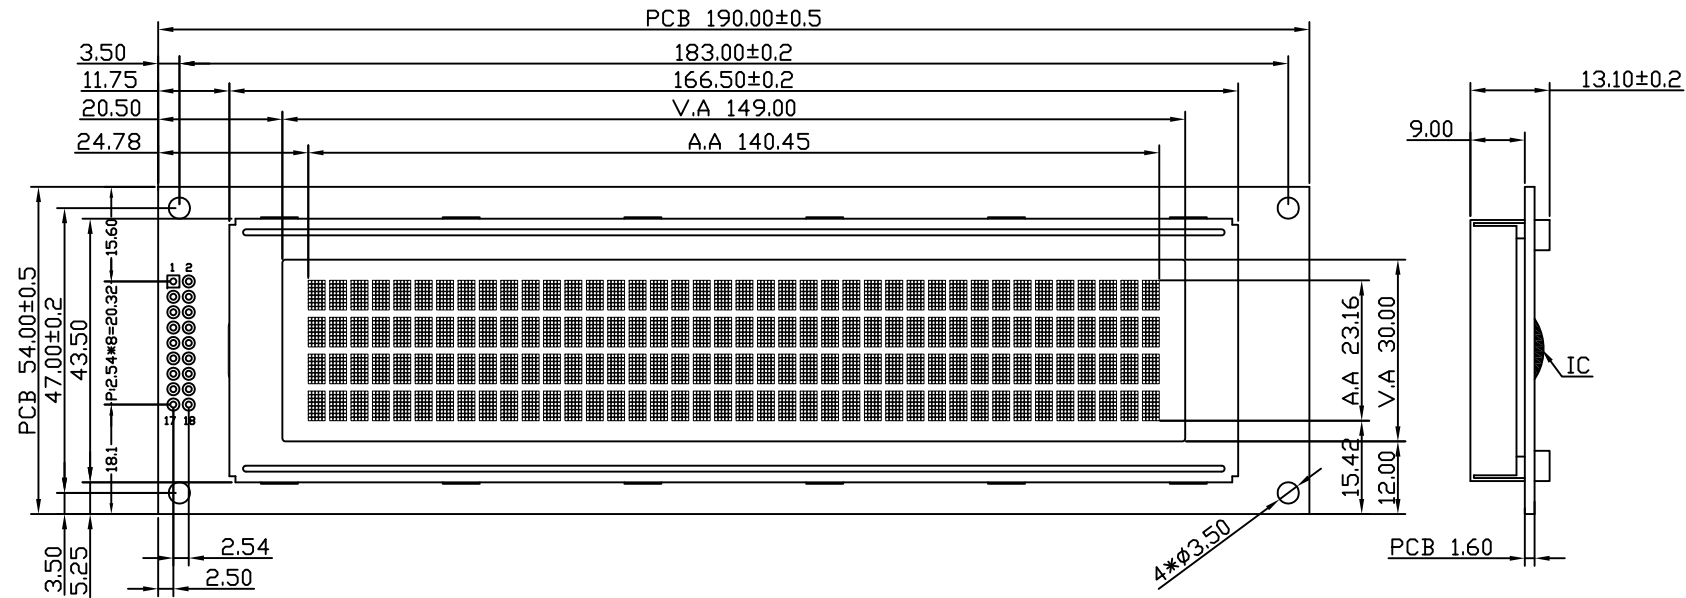

NO	Symbol
1	DB7
2	DB6
3	DB5
4	DB4
5	DB3
6	DB2
7	DB1
8	DB0
9	E1
10	RW
11	RS
12	V0
13	VSS
14	VDD
15	E2
16	NC
17	A
18	K

NOTES :

- |   |                                 |
|---|---------------------------------|
| 1. LCD TYPE:  | STN-Blue, Negative Transmissive |
| 2. OPERATING VOLTAGE:   | VDD=5.0V, Vop=5.0V              |
| 3. VIEWING DIRECTION:   | 6 O'CLOCK                       |
| 4. DRIVE METHOD:  | 1/16 Duty, 1/5 Bias             |
| 5. OPERATING TEMP:  | -20°C TO +70°C                  |
| 6. STORAGE TEMP:  | -30°C TO +80°C                  |
| 7. CONNECTOR TAPE:  | Zebra                           |
| 8. DRIVER IC:   | AIP31066 x2 or Equivalent       |
| 9. BACKLIGHT:   | White                           |
| 10. ALL sub-parts and materials of the parts, must comply with the RoHS instructions of EU. |                                 |

**UTECH** UTECH DISPLAY TECHNOLOGY CO., LTD.

TOLERANCES: ±0.2 ANGLES: ±0.1°	UNIT: MM	MODEL NO: UDCB4004-01	www.utechdisplay.com		
	DATE	DESIGNED	CHECKED	APPROVED	REV: 1.0
	2017-10-29	UD-05		UD-02	PAGE: 1-1